


# DRYING CABINET NIMO

## CONTROL PANEL

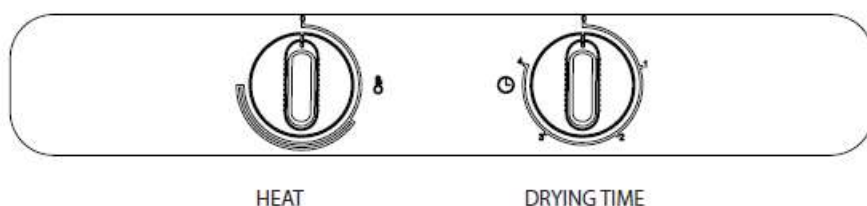

The cabinet is equipped with two knobs for setting different power modes.

The left-hand knob regulates heat with power modes on a stepless scale.

The right-hand knob regulates drying time steplessly up to four hours.

**Recommended temperature low: turn the heat knob to just after the start of the semi-circle and the drying time to between 3-4 hours.**

## ARRANGING LAUNDRY FOR DRYING

There are three sections with hangers in the cabinet, depending on choice of interior fittings. Each section has a number of rails for hanging laundry.


- ❑ Hang the items in the drying cabinet according to how much space they require - not according to their weight.
- ❑ For most efficient drying, do not lay item flat on the upper hanger section.
- ❑ Position long items closest to the walls of the cabinet and shorter items towards the centre of the cabinet. The most efficient drying results are achieved by hanging the items in this way.
- ❑ Fold up the two bottom hanger sections if long items are to be dried.
- ❑ Hang gloves, caps, scarves and similar items on the hanger strips on the inside of the door.
- ❑ All the hanger sections are extendible to make it easier to hang laundry. The hanger sections must be in their inner position when the door is closed.
- ❑ Do not overload the drying cabinet. If you do, the laundry will become creased and dry unevenly. Instead, leave a space between the items if possible.
- ❑ If there is a risk of particular items shedding colour, free space should be left around them.
- ❑ Avoid drying heavy items of clothing together with lighter items as they have very different drying times.
- ❑ Dry knitted products flat. These are heavy when wet and stretch unnecessarily if they are hung on a peg.

### USER TIPS

- ❑ Always following the laundry instructions on the item of clothing if present.
- ❑ If a fabric conditioner or anti-static agent is used, follow the manufacturer's instructions for use of this product.
- ❑ Adapt the drying temperature in the cabinet for products that contain foam rubber or similar material. Follow the manufacturer's instructions closely for the washing and drying of such products.

### AIR FLOW

The illustration shows the air flow in the drying cabinet.

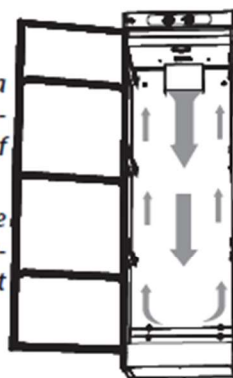

**Keep the area around the evacuation duct clear of dust and dirt.**

**Make sure that the air intake and exhaust duct are not blocked.**

**See page 6.**

**Note:** When the cabinet is cold it may happen that the door's sealing strip does not close completely. However, this is fully compensated when the cabinet is operating with heat as the sealing strip expands.